




# KRS Guide Wheel Bearing Co., Ltd

## 30 mm x 55 mm x 13 mm NTN 6006LLB deep groove ball bearings

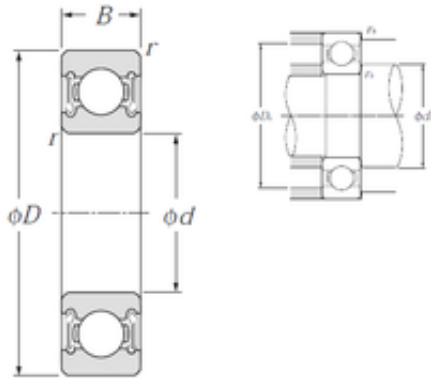

Bearing No. 6006LLB

6006LLB Bearing 2D drawings and 3D CAD models

Size	30x55x13 mm
Bore Diameter	30 mm
Outer Diameter	55 mm
Width	13 mm
d	30 mm
D	55 mm
B	13 mm
C	13 mm
r min.	1 mm
da min.	35 mm
da max	37 mm
Da max.	50 mm
ra max.	1 mm
Weight	0,116 Kg
Basic dynamic load rating (C)	13,2 kN
Basic static load rating (C0)	8,3 kN
(Grease) Lubrication Speed	13 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.116
EAN	4547359003772
Product Group	B00308
Enclosure	2 Seals



## KRS Guide Wheel Bearing Co., Ltd

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	30MM Bore; 55MM Outside Diameter; 13MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove   Non-Friction Nitrile Rubber Seal
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6006LLB
Weight / LBS	0.256
Bore	1.181 Inch   30 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outer Race Width	0.512 Inch   13 Millimeter
Outside Diameter	2.165 Inch   55 Millimeter
bore diameter:	30 mm
precision rating:	ISO Class 0



## KRS Guide Wheel Bearing Co., Ltd

outside diameter:	55 mm
finish/coating:	Uncoated
overall width:	13 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	13 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	13 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	13000 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	15000 RPM
dynamic load capacity:	13200 N
series:	60
static load capacity:	8300 N
manufacturer product page:	<a href="#">Click here</a>