




KRS Guide Wheel Bearing Co., Ltd

40 mm x 62 mm x 12 mm FAG HSS71908-E-T-P4S angular contact ball bearings

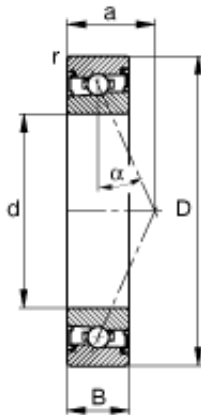

Bearing No. HSS71908-E-T-P4S

HSS71908-E-T-P4S Bearing 2D drawings and 3D CAD models

Size	40x62x12 mm
Bore Diameter	40 mm
Outer Diameter	62 mm
Width	12 mm
d	40 mm
D	62 mm
B	12 mm
a	18 mm
D_a	58,5 mm / Tolerance: H12
d_a	45 mm / Tolerance: h12
$r_{a \max}$	0,6 mm
r_{\min}	0,6 mm
	25 ° / Angle
m	0,135 kg / Weight
C_r	6400 N / Dynamic load rating (radial)
C_{Or}	4050 N / Static load rating (radial)
$n_{G \text{ Fett}}$	28000 1/min / Limiting speed for grease lubrication
Size	40x62x12 mm
Bore Diameter	40 mm
Outer Diameter	62 mm
Width	12 mm
d	40 mm
D	62 mm



KRS Guide Wheel Bearing Co., Ltd

B	12 mm
C	12 mm
Angle ()	25 °
a	18 mm
r min.	0,6 mm
Da	58,5 mm
ra max.	0,6 mm
da	45 mm
Weight	0,122 Kg
Basic dynamic load rating (C)	6 800 kN
Basic static load rating (C0)	6 400 kN
(Grease) Lubrication Speed	24 000 r/min