




KRS Guide Wheel Bearing Co., Ltd

40 mm x 62 mm x 12 mm NTN 6908LLB deep groove ball bearings

Bearing No. 6908LLB

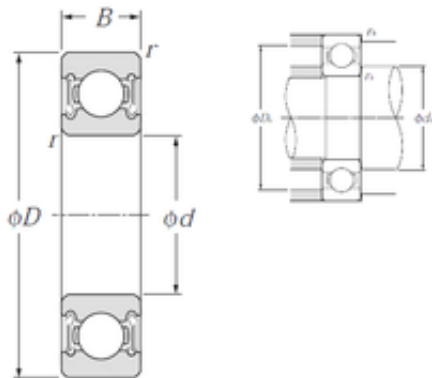

6908LLB Bearing 2D drawings and 3D CAD models

Size	40x62x12 mm
Bore Diameter	40 mm
Outer Diameter	62 mm
Width	12 mm
d	40 mm
D	62 mm
B	12 mm
C	12 mm
r min.	0,6 mm
da min.	44 mm
da max	45 mm
Da max.	58 mm
ra max.	0,6 mm
Weight	0,11 Kg
Basic dynamic load rating (C)	12,2 kN
Basic static load rating (C0)	8,9 kN
(Grease) Lubrication Speed	11 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.109
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



KRS Guide Wheel Bearing Co., Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	40MM Bore; 62MM Outside Diameter; 12MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6908LLB/2AS
Weight / LBS	0.241
Bore	1.575 Inch 40 Millimeter
Outer Race Width	0.472 Inch 12 Millimeter
Outside Diameter	2.441 Inch 62 Millimeter
bore diameter:	40 mm
precision rating:	ISO Class 0
outside diameter:	62 mm
finish/coating:	Uncoated
overall width:	12 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round



KRS Guide Wheel Bearing Co., Ltd

cage material:	Steel
closure type:	Double Sealed
inner ring width:	12 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	12 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	11000 rpm
internal clearance:	CN
fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	11000 RPM
dynamic load capacity:	12200 N
series:	69
static load capacity:	8900 N
manufacturer product page:	Click here