




KRS Guide Wheel Bearing Co., Ltd

85,000 mm x 130,000 mm x 22,000 mm NTN-SNR 6017ZZ deep groove ball bearings

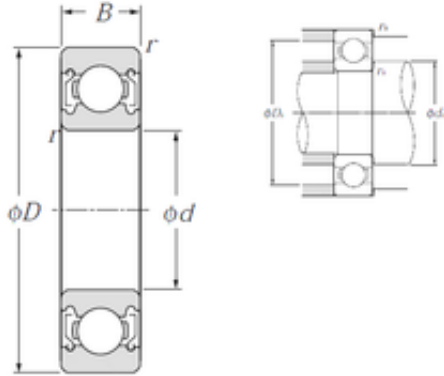

6017ZZ Bearing 2D drawings and 3D CAD models

Bearing No. 6017ZZ

Size	85x130x22 mm
Bore Diameter	85 mm
Outer Diameter	130 mm
Width	22 mm
d	85 mm
D	130 mm
B	22 mm
C	22 mm
rn	0,5 mm
r min.	1,1 mm
da min.	91,5 mm
da max	97 mm
Da max.	123,5 mm
ra max.	1 mm
Weight	0,89 Kg
Basic dynamic load rating (C)	49,5 kN
Basic static load rating (C0)	43 kN
(Grease) Lubrication Speed	5 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359004243
Product Group	B00308



KRS Guide Wheel Bearing Co., Ltd

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	85MM Bore; 130MM Outside Diameter; 22MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	1.98416
Outside Diameter	5.118 Inch 130 Millimeter
Outer Race Width	0.866 Inch 22 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Bore	3.346 Inch 85 Millimeter
bore diameter:	85 mm
static load capacity:	43000 N
outside diameter:	130 mm



KRS Guide Wheel Bearing Co., Ltd

precision rating:	ISO Class 0
overall width:	22 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Shielded
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	22 mm
snap ring included:	Without Snap Ring
outer ring width:	22 mm
internal clearance:	CN
maximum rpm (grease):	5000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.1 mm
dynamic load capacity:	49500 N
manufacturer product page:	Click here