




KRS Guide Wheel Bearing Co., Ltd

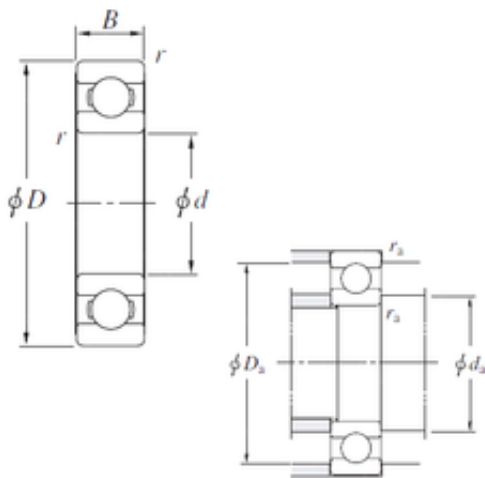

110 mm x 170 mm x 28 mm KOYO 6022 deep groove ball bearings

Bearing No. 6022

6022 Bearing 2D drawings and 3D CAD models

Size	110x170x28 mm
Bore Diameter	110 mm
Outer Diameter	170 mm
Width	28 mm
d	110 mm
D	170 mm
B	28 mm
C	28 mm
r min.	2 mm
da min.	119 mm
Da max.	161 mm
ra max.	2 mm
Weight	1,96 Kg
Basic dynamic load rating (C)	82 kN
Basic static load rating (C0)	73 kN
(Grease) Lubrication Speed	3800 r/min
(Oil) Lubrication Speed	4500 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	KOYO
Minimum Buy Quantity	N/A
Weight / Kilogram	2.122
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0



KRS Guide Wheel Bearing Co., Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	110MM Bore; 170MM Outside Diameter; 28MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.koyousa.com
Manufacturer Item Number	6022
Weight / LBS	4.673
Outer Race Width	1.102 Inch 28 Millimeter
Bore	4.331 Inch 110 Millimeter
Outside Diameter	6.693 Inch 170 Millimeter
Bearing No.	6022
r(min)	2
Cr	103
C0r	73.0
Cu	3.55
f0	15.6
Grease lub.	3800
Oil lub.	4500



KRS Guide Wheel Bearing Co., Ltd

da(min)	119
Da(max)	161
ra(max)	2
(Refer.)Mass(kg)	1.96